
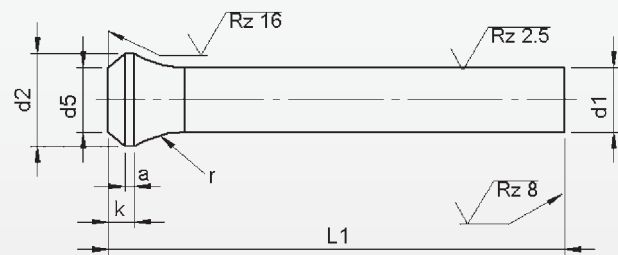


Posaunenhalbs Typ P

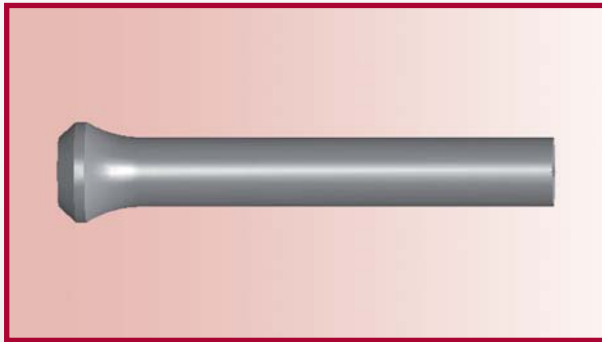

Werkstoff: HSS (1.3343)

Härte: Schaft: 64 ±2 HRC
Kopf: 50 ±5 HRC

d ₁	d ₂	k	a	d ₅	r	L ₁ ^{+0.5} ₀				
						71	80	90	100	120
h6	0 -0.2	+0.2 0			0 -0.2	Preis pro Stück in EURO				
3,0	4,5	4.0	1.5		6.5	3,60	4,00	4,45	4,95	5,45
3,5	5,0				8.0	4,50	5,00	5,55	6,20	6,80
4,0	5,5					3,85	4,30	4,75	5,25	5,75
4,5	6,0				4,80	5,40	5,95	6,55	7,20	
5,0	7,0				10.0	4,35	4,80	5,35	5,95	6,55
5,5	8,0					5,45	6,00	6,70	7,45	8,20
6,0	9,0				4,75	5,25	5,80	6,45	7,10	
6,5	10,0				12.0	5,95	6,55	7,25	8,05	8,90
7,0	10,0					4,15	5,60	6,20	6,85	7,50
7,5	11,0				5,20	7,00	7,75	8,55	9,40	
8,0	11,0				5,95	6,60	7,30	8,10	8,90	
8,5	13,0				15.0	7,45	8,25	9,15	10,15	11,15
9,0	13,0					6,35	7,05	7,85	8,70	9,60
9,5	14,0					7,95	8,80	9,80	10,90	12,00
10,0	14,0					6,60	7,30	8,10	9,00	9,90
10,5	15,0					8,25	9,15	10,15	11,25	12,40
11,0	15,0					6,80	7,55	8,40	9,30	10,25
11,5	16,0					8,50	9,45	10,50	11,65	12,80
12,0	16,0					8,40	9,30	10,35	11,50	12,65
12,5	17,0					10,50	11,65	12,95	14,40	15,80
13,0	17,0	9,90	10,95	12,15		13,50	14,85			
13,5	18,0	11,55	12,70	13,95	15,35	16,80				
14,0	18,0	12,15	13,35	14,55	15,95	17,60				
14,5	19,0	12,75	13,95	15,15	16,55	18,00				

Zwischenabmessungen und andere Längen und Sonderwerkstoffe z.B. ASP, CPM und Vanadis sind kurzfristig auf Wunsch lieferbar.

Für Mehr- und Minderpreise siehe Blatt 2.