


Stempelführungsbuchsen DIN 9845 C

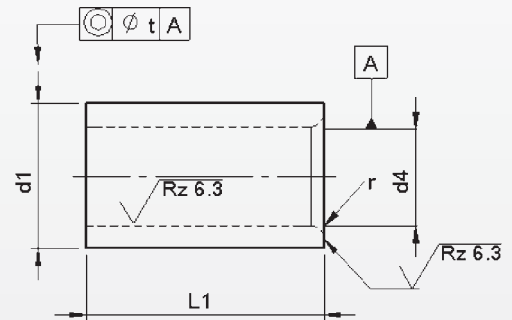

Werkstoff: HWS (1.2379)

Härte: Schaft: 64 ±2 HRC

d ₄			d ₁	l ₁	r	t	d ₄	Preis pro stück in EURO
≥	H7	≤	n6					
		1.0	5	9	1.0	0.01	0.10	Preise auf Anfrage
1.1	-	2.0	6	12	1.0	0.01	0.10	
2.1	-	3.0	7	12	1.0	0.01	0.10	
3.1	-	4.0	8	12	1.0	0.01	0.10	
4.1	-	5.0	10	16	1.0	0.01	0.10	
5.1	-	6.0	12	16	1.5	0.01	0.10	
6.1	-	8.0	15	20	1.5	0.01	0.10	
8.1	-	10.0	18	20	2.0	0.01	0.10	
10.1	-	12.0	22	28	2.0	0.01	0.10	
12.1	-	15.0	26	28	2.0	0.01	0.10	
15.5	-	18.0	30	36	2.0	0.01	0.50	