
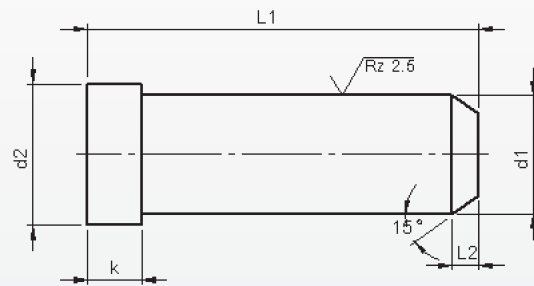


Führungssäulen Typ G100

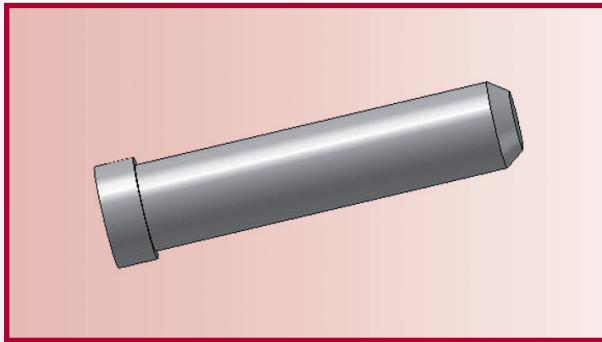

Werkstoff: 1.7262
Härte: 60 ±2 HRC

d_1 g6	10	12	14	16	18	20	22	24	26
d_2 -0.2	12	16	18	20	22	24	26	28	30
k	3	6	8	8	8	8	15	15	15
l_1	Preis pro Stück in EURO								
40	4,05	4,35							
60	4,20	4,80	4,85	5,25	5,55				
80	4,35	5,00	5,10	5,55	6,10	6,95	7,95		
100	4,80	5,40	5,75	6,35	6,95	7,75	9,05	10,10	11,80
120	5,40	6,10	6,35	7,20	7,95	9,10	11,10	11,85	14,00
140		6,70	7,75	8,20	9,05	9,95	11,80	13,10	15,45
160		7,40	9,05	9,50	9,95	11,15	13,10	14,30	17,00
180			10,10	10,75	11,60	12,75	14,40	15,60	18,65
200			11,20	12,15	12,45	14,30	15,80	16,75	20,20
220			13,00	15,95	15,95	15,95	17,80	19,50	26,15
240				18,85	19,15	18,90		21,85	
270								28,60	